

CONCEPTUAL TRACK CROSSING PLAN FOR WATER/SEWAGE PIPE LINE FOR GUIDANCE

APPLICATION ID	CR-PUNE-2024-WL-10
----------------	--------------------

TOTAL LENGTH BETWEEN RLY LAND BOUNDARY = (40.00)M

RAIL LEVEL-100.00(ASSUMED)

FORM. LEVEL-99.30



GROUND LFWL 98.70

TOP OF CASING PIPE


(1000) MM

Diagram illustrating the dimensions of the carrier pipe and casing pipe:


- Carrier Pipe: Outer Diameter (OD) = 500 mm, Wall Thickness = 8 mm.
- Casing Pipe: Outer Diameter (OD) = 480 mm, Wall Thickness = 8 mm.

SECTION

SITE PLAN

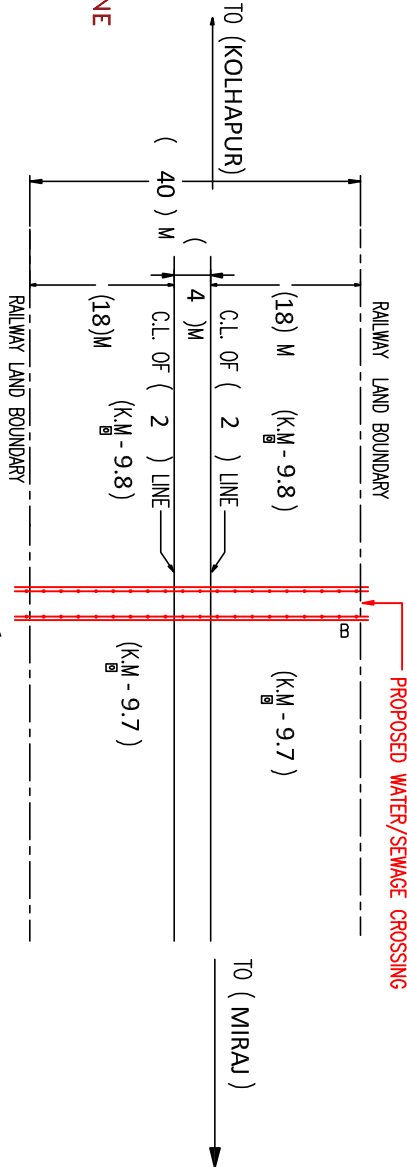

CASE-1 : FOR LOW EMBANKMENT PIPE BURIED IN GROUND

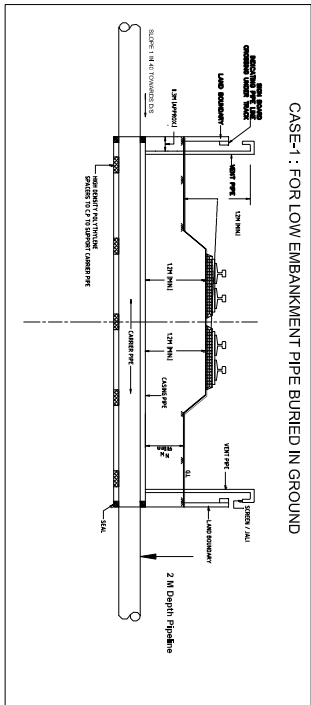

MINIMUM THICKNESS OF STEEL CASING PIPES	
(AS PER RSO GUIDE LINE BS-105 PARA 1.3.5)	
NOMINAL DIAMETER OF CASING PIPE	MINIMUM THICKNESS OF CASING PIPE(t)
250 mm	5 mm
300 mm	5 mm
350 mm	5 mm
400 mm	6 mm
450 mm	7 mm
500 mm	8 mm
600 mm	8 mm
700 mm	10 mm
800 mm	12 mm
900 mm	12 mm
1000 mm	14 mm
1100 mm	16 mm
1200 mm	16 mm
1300 mm	18 mm
1400 mm	20 mm
1500 mm	20 mm
1600 mm	22 mm
1700 mm	22 mm

ABBREVIATIONS USED		VALUE
di	INTERNAL DIAMETER OF PIPE (MINIMUM 350 MM IF LENGTH OF CROSSING IS 15 M OR MORE)	500 MM
de	EXTERNAL DIAMETER OF PIPE	800 MM
t	THICKNESS OF PIPE	8 MM
D	DISTANCE BETWEEN CENTER LINE OF NEAREST TRACK & R.LY.BOUNDARY	5 M
CC	CEMENT CONCRETE	M 20
d1	DEPTH OF CASING PIPE BELOW N.G.L.	1 M
d2	MINIMUM CUSHION	1 M
H	HEIGHT OF FORMATION FROM N.G.L.	0.75 M
E	EXCAVATION DEPTH OF CATCH/ PUSH PIT	1.5 M

DIA OF CASING PIPE	d1	d2
LESS THAN 700 MM	—	600 MM MINIMUM
700–1200	—	900 MM MINIMUM
> 1200	900 MM	1200 MM MINIMUM WHICHEVER GIVES MAX SURCHARGE

NOTES:

1. EXISTING WORK SHOWN IN BLACK.
2. PROPOSED WORK SHOWN IN RED.
3. M.S / H.D.P.E / C.I CASING PIPE TO BE PROVIDED IN BETWEEN RLY.BOUNDARIES
4. THE WORK WILL BE DONE BY HORIZONTAL BORING METHOD UNDER THE RLY.
TRACK THROUGHOUT RLY. BOUNDARY AND PIT FOR BORING WILL BE MADE
OUTSIDE RLY. BOUNDARY.
5. CABLE INDICATING BOARDS TO BE FIXED AT RLY. BOUNDARIES BY THE PARTY.
6. ANY DAMAGE IN U/G CABLE,PIPE LINE,DRAINS ETC. WILL BE BORNE BY THE
PARTY.
7. THE WORK TO BE DONE IN THE PRESENCE OF S&T SUPERVISOR.
8. LAYING OF PROPER EARTHING ARRANGEMENT TOBE DONE UNDER RLY.
ELECT.SUPERVISOR.

** PARTY SHOULD FILL ALL THE DETAILS CORRECTLY IN CONSULTATION WITH
CONCERNED RAILWAY SUPERVISOR TO AVOID REJECTION OF APPLICATION.

NAME OF PIPE OWNING ORGANISATION	DEN/Sr.DEN	
-------------------------------------	------------	--

DRM	
ADRM	
Sr.DEN/C	

THEIR PROVISIONS, IT IS FURTHER CERTIFIED THAT WORK WILL BE EXECUTED CONFORMING TO RDSO GUIDE LINES BS-105, AND APPROVED DRAWINGS.	WAY LEAVE FACILITIES FOR LAYING OF (800) MM DIA. CASING PIPE FOR PASSING OF (500) MM WATER/ SEWAGE PIPE LINE BET: KM: (9.70) KM: (9.80) AND (JAYINGPUR) SECTION
SIGNATURE	

NAME	
DESIGNATION WITH SEAL	
FEASIBILITY OF THE PROPOSAL HAS BEEN CHECKED AND FOUND FEASIBLE AS SHOWN IN PLAN.	

ADEN/(	)